




Input View

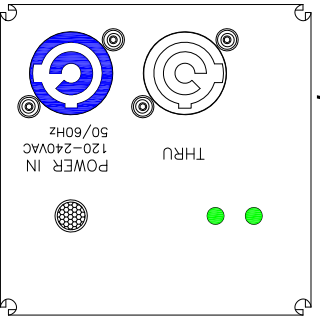

Top View


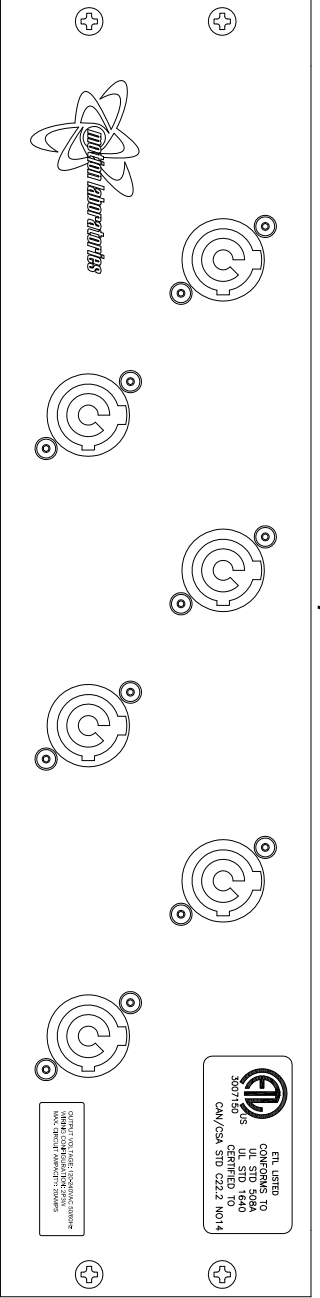


Output View



FOR USE BY QUALIFIED PERSONNEL ONLY
 The operation of safety devices shall be performed by qualified personnel only.
 Type 1 Enclosure
 Indoor Use Only
 Input Voltage: 120-240VAC 50/60Hz
 Max Ampacity: 20 Amps
 Part No.: 1150-01-200-408-0001
 Serial No.: 200A

POUR USAGE PAR LE PERSONNEL QUALIFIE
 Les manœuvres de dispositifs de protection doivent être effectuées par du personnel qualifié.
 Type 1 Enclosure
 Usage Intérieur
 Tension d'Entrée: 120-240VAC 50/60Hz
 Capacité Max: 20 Ampères
 Numéro de Pièce: 1150-01-200-408-0001
 Numéro de Série: 200A

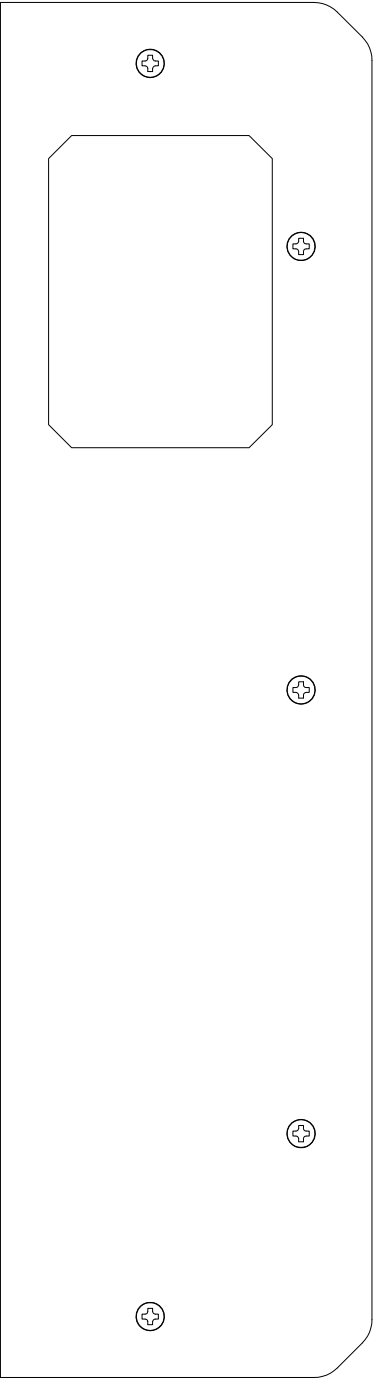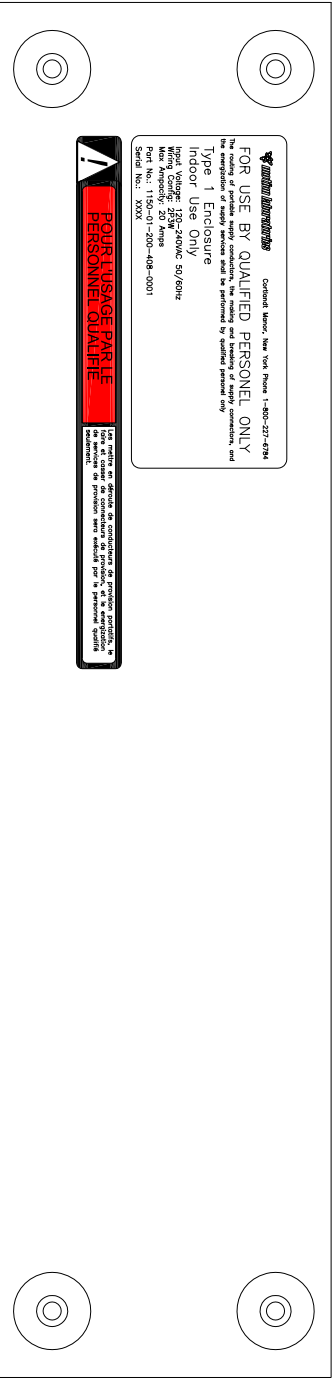

Copyright © 2006, Motion Laboratories, Inc. All Rights Reserved. THIS DOCUMENT IS THE EXCLUSIVE CONFIDENTIAL PROPERTY OF MOTION LABORATORIES, INC. AND IT SHALL NOT BE REPRODUCED, COPIED, OR USED FOR ANY PURPOSE WHATSOEVER, UNLESS, AND STRICTLY TO THE EXTENT, SUCH IS EXPRESSLY AUTHORIZED BY MOTION LABORATORIES, INC. IN WRITING.

TITLE		DRAWN BY		DATE DRAWN		SIZE		DRAWING NUMBER		REV	
Stringer Box, 20A Powercon I/O		-		-		A		1150-01-200-408-0001		-	
MODEL FILENAME & PATH		CHECKED BY		DATE CHECKED		SCALE		SHT		OF	
-		-		-		NONE		1		1	