


**PART NUMBER: 1320-04-05-01-001**



|                    |   |
|--------------------|---|
| <b>DESCRIPTION</b> | 200A Inline Disconnect, MXF, 10Ka   |
| Dimensions         | 23" Overall Length, 12" Over Width, 10.5" Overall Height  |
| Weight             | 34lbs   |
| Voltage            | 120/208Y VAC 3Phase 60Hz  |
| Breaker Type       | Square D Brand Q Frame, 3 Pole, UL Listed, CSA Certified, IEC Rated   |
| Breaker Ratings    | 200 Amperes, 240VAC, 10Ka Interrupt Rating.   |
| Construction       | Covers Made from Boltaron 4335 Extruded Acrylic PVC Alloy Sheet, UL94 V-0 Rating, ¼" Thick. Panels are .125 Aluminum, Black Anodized, Diamond Bit Engraving, NEMA 1 |
| Listing            | ETL Listed. Conforms to UL STD 1640, UL STD 508A, Certified to CAN/CSA STD C22.2 No 14  |

**CONNECTOR SPECIFICATIONS**

|                        |  |
|------------------------|--|
| <b>CONNECTORS, I/O</b> | Marinco Brand, Cam Tech Device, 400A/600V, 16 Series, 5 Colors, UL/CSA   |
| <b>FEATURES</b>        | Blue LED Indicators on Line and Load side of Breaker, Aluminum Anodized and Color coded doors on Output Phases. (Neutral and Ground Doors available) |
| <b>OPTIONS</b>         | 25Ka, 65Ka or 100Ka Current Interrupt ratings available. Reverse Ground and/or Neutral connector configurations available                            |

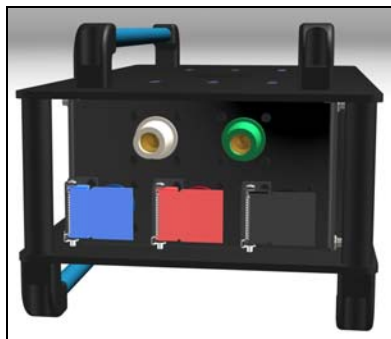

**1.800.227.6784** FOR MORE INFORMATION  
<http://www.motionlabs.com/>

520 Furnace Dock Road . Cortlandt Manor, New York 10567 . Phone: (914)788-8877 Fax: (914)788-8866